

TMR65KDS walk-behind roller

**HITACHI**

Reliable solutions

**TMR65**



**WALK-BEHIND ROLLER**

Model code: TMR65KDS

# WALK-BEHIND ROLLER

Suitable for a number of small-scale compaction jobs, including those incorporating asphalt and sand, the new series of Hitachi walk-behind rollers is designed to be highly productive and easy to operate. The TMR65KDS model is equipped with conveniently located levers and switches, along with several time-saving features designed to optimise productivity and availability.



## Reliable technology and increased availability



### Optimum performance

The TMR65KDS walk-behind roller offers exceptional performance and quality thanks to the direct connection between the hydraulic motors and the drums – without the need for a gear reduction system.

With only a 650mm drum width, these lightweight machines offer excellent manoeuvrability. A high level of linear pressure ensures optimal performance and a powerful compaction force.

Energy is transferred from engine rotation to the hydraulic pump via the V-belt – this powers the motors in each drum. By operating the FNR lever, the operator can easily adjust the flow of hydraulic liquid and change the direction of travel.

Additionally, a low overall height means better visibility for the operator – and safer working conditions on the job site.

### Minimal downtime

The TMR65KDS has been designed to make life easier on the job site through a number of time-saving features, which help to increase availability.

Maintenance can be carried out quickly and effortlessly, thanks to the one-touch keyed gull-wing engine cover. This allows convenient access to the engine and reduces servicing times.

The pull-out sprinkler nozzle is a simple and effective cleaning tool. The 35-litre capacity sprinkler tank also ensures that a large amount of cleaner can be made available out in the field.

Additional features include a wide opening for lifting, making transportation between job sites easier than ever. A conveniently located parking brake and reverse travel-stop knob also help to increase job-site safety.

### Key features

- High performance and quality
- Low overall height for greater visibility
- Simple vibration mechanism
- Lightweight for enhanced manoeuvrability
- Easy access to engine
- Pull-out sprinkler nozzle
- Keyed gull-wing engine cover

# SPECIFICATIONS



## Specifications

TMR65KDS		
Machine weight*	kg	640
<b>Engine</b>		
Model	Kubota E75-ENB3	
Rated output	kW (PS)	4.0 (5.5)
Centrifugal force	kN (kgf)	10.8 (1 100)
Fuel	Diesel fuel	


\* Machine weight includes weight of machine, hydraulic oil, lubricants, engine oil and 50% of fuel

# Excellent manoeuvrability and easy maintenance

## Dimensions

Unit: mm

Model	TMR65KDS
A	2 385
B	1 295
C	700
D	1 150
E	1 800
F	560
G	246
H	650
I	402
J	260 (R/L)

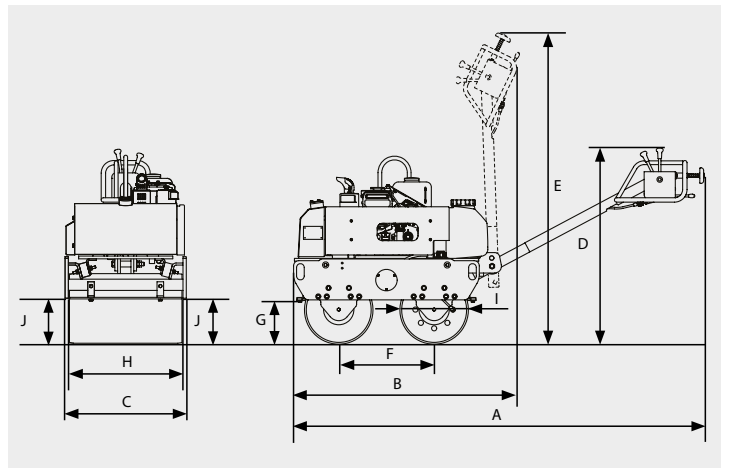

© Hitachi Construction Machinery (Europe) NV (HCME). All rights reserved. Reproduction in whole or in part is forbidden except with the written permission of HCME. While every effort is made to ensure the accuracy of information published, HCME is not responsible for inaccuracies or omissions. All views expressed are not necessarily those of HCME.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, customer installed and modified parts, optional parts and all standard equipment with some differences in color and features. Before use, read and understand the Operator's Manual for proper operation.

Hitachi Construction Machinery  
www.hcme.com

KR-EN032EUP

Printed in Europe